


# Fastener Type

## BLACK MAGIC® SH/05TR

### Composite Staple (16 Gauge)

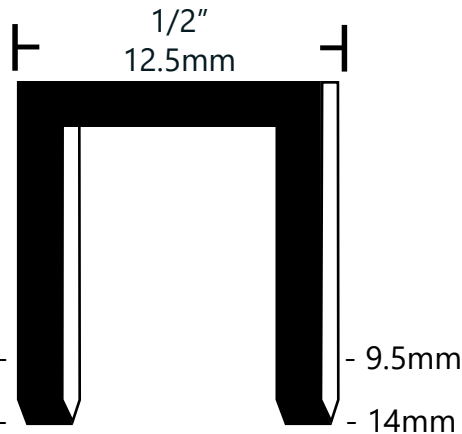

#### Part #

\*SH/05-37TR 3/8" - 9.5mm

SH/05-55TR 9/16" - 14mm

\*(Low melt staple for cure chambers <215°)

#### Packaging

SH/05-37TR : 5040 staples per box • 20 boxes per case  
 SH/05-55TR : 4200 staples per box



## BENEFITS

- ✓ No staple removal
- ✓ No cut or abrasion marks from removing
- ✓ No metal staples littering the floor
- ✓ Eliminates envelope punctures
- ✓ Fewer tire re-runs
- ✓ Reduces labor and material costs
- ✓ No metal staple injuries

## FEATURES


- ✓ Melts during cure cycle
- ✓ SH/05-37TR has a low melting temperature for cure chambers below 215°
- ✓ Completely non-metal

## APPLICATIONS

Tire splice  
 Bench splice  
 Wick pad  
 Poly film  
 Tire tags

## TOOLS

OMER 82P Series

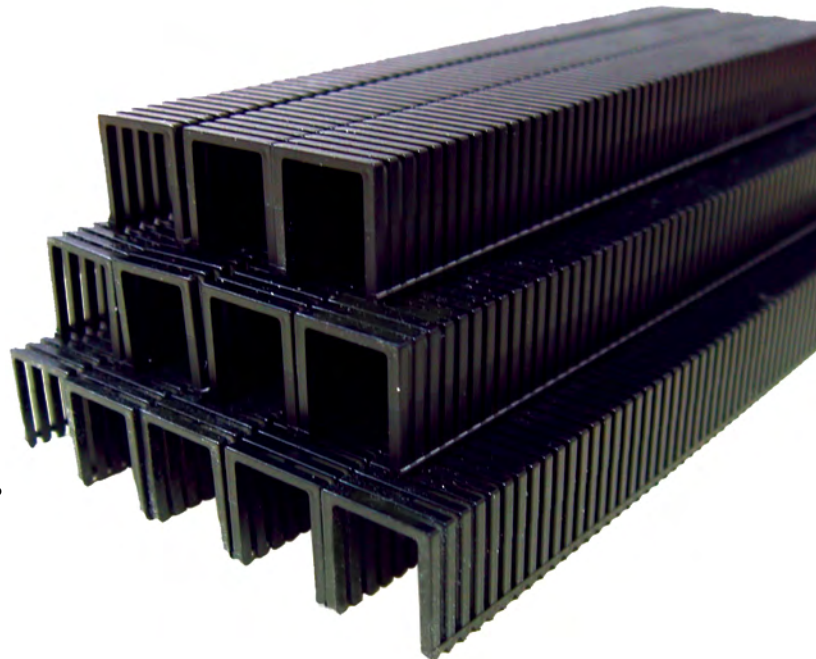



# OMER 82P Series Stapler

The 82P stapler drives BLACK MAGIC®, 16 gauge, composite, tire retread staples. It is extremely fast, lightweight, well-balanced and rugged.

It is offered in a standard-length magazine and a long magazine version for operators who prefer less reloading.

The 82P is also offered with a trigger safety or with a contact trip safety to reduce the possibility of accidental firing.



## TECHNICAL DATA

Model	82P	82PS	82PCL	82PSCL
Magazine capacity	65 staples	65 staples	130 staples	130 staples
Operating air pressure	60 – 90 psi (4 – 6 bar)			
Dimensions LxWxH	8.5" x 1.7" x 5.8" (216 x 43 x 148mm)	8.5" x 1.7" x 5.8" (216 x 43 x 148mm)	13.8" x 1.7" x 5.8" (350 x 43 x 148mm)	13.8" x 1.7" x 5.8" (350 x 43 x 148mm)
Weight	2.0 lb (0.9 kg)	2.0 lb (0.9 kg)	2.4 lb (1.1 kg)	2.4 lb (1.1 kg)
Safety	Trigger	Contact	Trigger	Contact

